


SPECIFICATIONS	
	FIELD LOADER
LENGTH	10' Horizontal, 35' O.A.L., 25' Incline
DISCHARGE HEIGHT	13'-6"
FRAME	M.S. or 304 S.S.
UNDER-CARRIAGE	Portable w/215/75R 15 Tires
DRIVE	20 H.P. Kohler 2 Cyl. Gas Engine w/hyd. pump & motor

## FEATURES/OPTIONS

### Optional

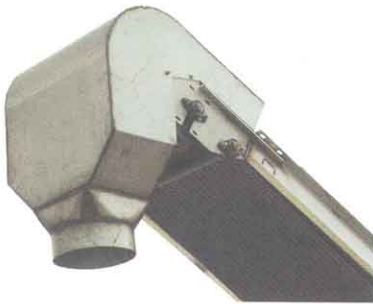

**Round Discharge Spout**

- 24" wide Crescent top belt w/S.S. lacing - STD
- Up to 150 tons/hr. discharge rate - STD
- Crowned & lagged pulleys - STD
- 2" steel return rollers - STD
- 1" bearings throughout - STD
- Direct head Drive - STD
- 12" round discharge chute - OPT
- Adjustable discharge chute - OPT
- Rain covers - OPT
- 10 H.P. electric motor/hydraulic drive - OPT

Doyle is constantly striving to improve its products and therefore reserves the right to change design, materials and/or specifications without notice and without incurring any liability on units already sold.

### 20 H.P. Kohler



### Optional



**Hydraulic Wheel Drive**

### Optional



**Kubota Diesel**



## Doyle Equipment Mfg. Co., Inc.

P.O. Box 3024 • 4001 Broadway  
 Quincy, IL USA 62305  
 217-222-1592 • Fax 217-223-3655  
 Toll Free 800-788-8085

E-mail: doyle@doylemfg.com • Website: www.doylemfg.com